






Features			Applications		
<ul style="list-style-type: none"> ● Industrial Temperature ● SMD Package(7.0×5.0mm) 			<ul style="list-style-type: none"> ● Base Stations ● Instrumentations ● Synthesizer ● SDH/SONET ● Medical Electronics 		
					
BT0507C&D Specifications					
Parameter	Value			Unit	Conditions
	Min.	Typ.	Max.		
Supply Voltage	-	3.3	-	V	
	-	5	-	V	
Supply Current	-	-	8	mA	10MHz~26MHz (Including 26MHz)
	-	-	12	mA	26MHz~60MHz
Frequency Range	10 ~ 50			MHz	
Nominal Frequency	10, 16.384, 19.2, 20, 24.576, 25, 26, 30.72, 40, 50			MHz	
Initial Frequency Tolerance	±0.5	-	±1.0	ppm	At shipment, nominal EFC, +25°C
Freq. Stability Vs. Temp.	±0.5	-	±1.0	ppm	-20°C~+70°C
	±0.5	-	±1.0	ppm	-40°C~+85°C
Clipped Sine Wave	Output Level	0.8	-	Vp-p	
	Load	10kΩ/10pF			
HCMOS	V _{OH}	2.4	-	V	HCMOS Output, Load=15pf
	V _{OL}	-	0.4	V	HCMOS Output, Load=15pf
	Duty Cycle	45	-	%	(V _{OH} - V _{OL})/2
	Rise/Fall Edge	-	-	ns	HCMOS Output, Load=15pf
	Load	-	-	15	pf
RMS Jitter(By E5052B)	-	-	1.3	ps	12KHz~5MHz
Supply Sensitivity	-	-	±0.1	ppm	V _{cc} ±5%
Load Sensitivity	-	-	±0.2		Load±5%
Aging/ First Year	-	-	±1.0		Standard
	±0.3	-	±0.8	Customized	
SSB Phase Noise @10MHz	-	-	-95	dBc/Hz	Offset 10Hz
	-	-	-120		Offset 100Hz
	-	-	-140		Offset 1kHz
	-	-	-145		Offset 10kHz
	-	-	-150		Offset 100kHz
Control Voltage Range	1.5 ± 1.0			V	
Frequency Tuning Range	±5	-	±12	ppm	
Tuning Slope	positive				
Non-linearity	-	-	10	%	
Phase Noise @1KHz					
Frequency Range	<-125dBc	<-130dBc	<-135dBc	<-140dBc	○=Available X= Not Available
10MHz	○	○	○	○	
12.8MHz~20MHz	○	○	○	X	
20.48MHz~38.4MHz	○	○	X	X	
≥40MHz	○	X	X	X	
Environmental Conditions					
Operating Temperature Range	-40°C~+85°C				
Storage Temperature Range	-55°C ~ +125°C				

Outline Dimension & Pin Connections


Package C:







Pin Connections

Pin1	Vcon/NC
Pin2	GND
Pin3	Output
Pin4	Vcc

Recommended Land Pattern




Package D:



Pin Connections

Pin1	Vcon/NC
Pin2	GND
Pin3	Output
Pin4	Vcc

Recommended Land Pattern



Note: Leave pin 1 unconnected if Vcon is not used.

Maximum Ratings


Parameter	Symbol	Rating
Supply Voltage	Vdd	-0.5V / 6V
Control Voltage	Vcon	0V / 3V
ESD, HBM/CDM/MM		4KV/ 2KV/ 200V

Reliability

Parameter	Condition
Temperature Stress Test	IEC60068, GJB360B
Mechanical Stress Test	IEC60068, GJB360B
EMC Test (ESD)	IEC61000, JESD22
Solderability	EIA/JESD22-B102-C
Contact Pads	Gold over Nickel
RoHS	RoHS Directive 2011/65/EU Annex II Recasting 2002/95/EC

Ordering Guide

BT 0507 X X X X XXX X X XX.XX

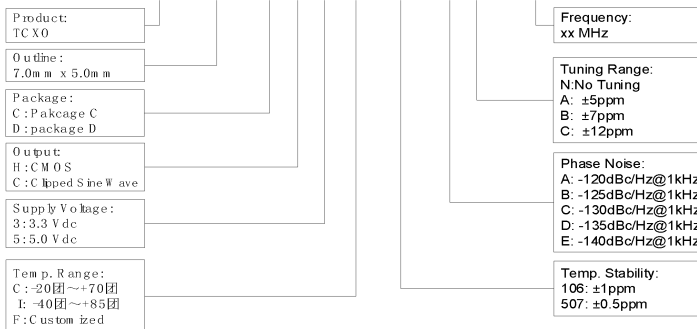

Example: BT0503DH3C106CA30.72

Disclaimer

XtalTQ Technologies Co., Limited reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.